




BM900

TAGLIERINA INCLINABILE
INCLINING FOAMCUTTING MACHINE

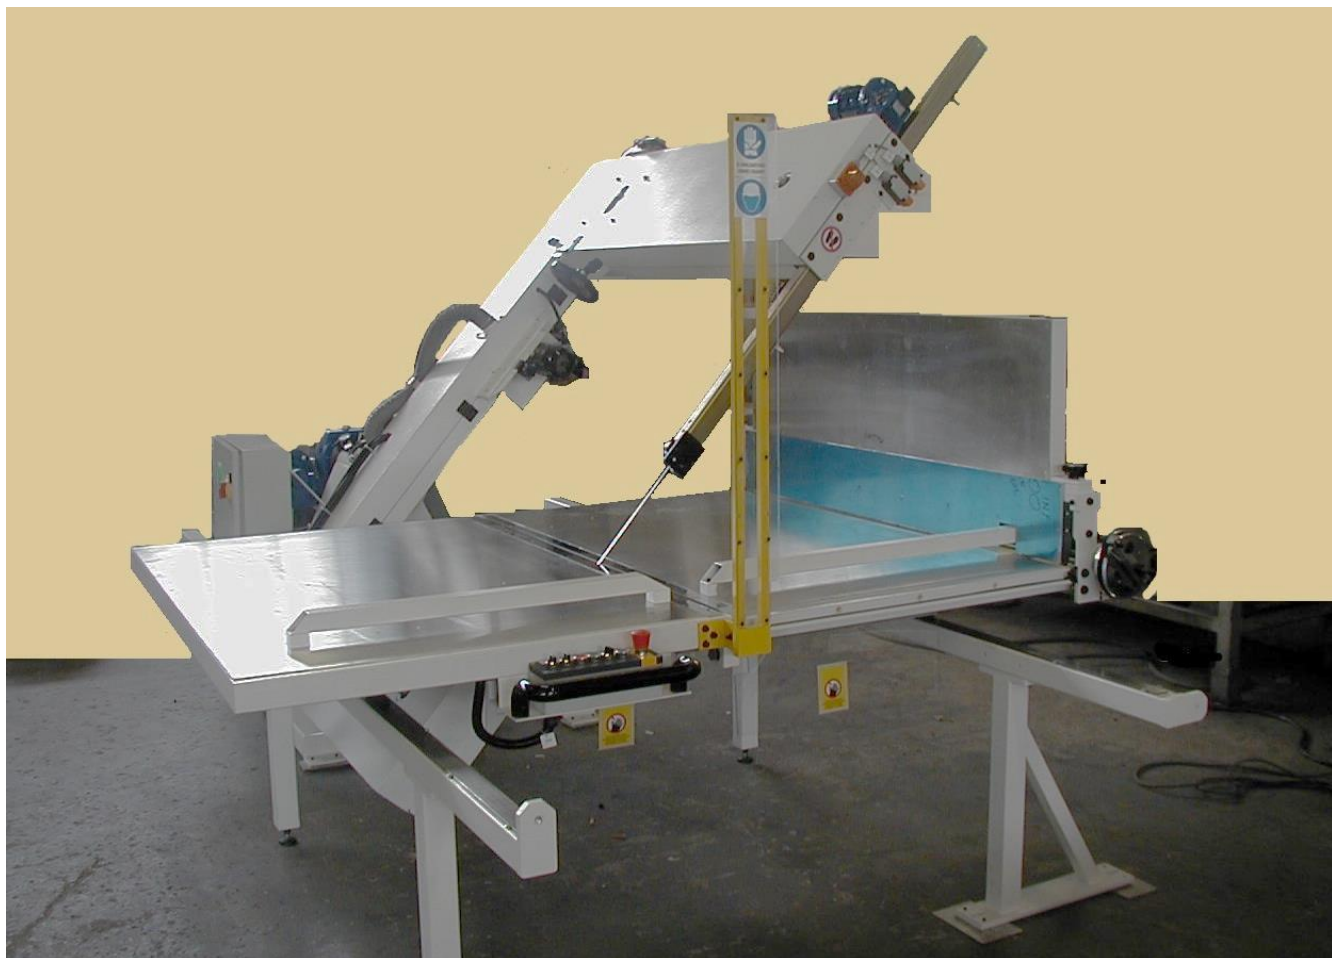

DATI TECNICI- *Technical data*

H utile di taglio- *Working cutting height*

Banco dx lama- *Right table*

Banco sx lama- *Left table*

Lunghezza taglio- *Cutting length*

H squadra- *Headboard height*

Inclinazione massima- *max. inclination*

Potenza/tensione- *Power/Voltage*

Peso- *Weight*

Ingombro- *Overall dimensions*

MOD. BM 900

860mm

1000mm

1000mm

1200mm

200+400mm

60°

5.7 KW, 400V 50Hz

1030 Kg

4390x3770x3260mm

CAMRE SNC DI MARIN Ulisse & c.

Via Menarè 306 31029 VITTORIO VENETO - TREVISO - ITALY - TEL. +39 0438500298

camre@nline.it

www.camre.it

CARATTERISTICHE-Features

- Taglio verticale e inclinato di blocchi di piccole e medie dimensioni
 - Materiali lavorabili: PU espanso flessibile, polietilene espanso, visco, agglomerato e simili fino a 80kg/mc max
 - Grazie alle sue ridotte dimensioni e al sistema di lavoro frontale è utilizzata specialmente nella prototipazione
 - Affilatore motorizzato con aspiratore polveri d'affilatura
 - Dispositivo di sblocco freno lama per agevolare le operazioni di sostituzione lama.
 - I movimenti del banco e della squadra sono manuali. A mezzo pulsantiera si gestiscono i movimenti della lama, del guidalama, dell'inclinazione lama e dell'affilatore.
 - OPTIONAL: protezione frontelama interbloccata per la sagomatura manuale in sicurezza
- *Vertical and inclining cuts of small and medium size foam blocks.*
 - *Material to be worked: expanded flexible PU, PE foam, visco, bonded foam and similar up to 80 kg/mc max.*
 - *Thanks to its reduced dimensions and frontal working system it is mainly used for prototyping.*
 - *Motorized grinding unit with exhaust system*
 - *Brake unlocking device of band-knife motor to make easy the blade changing*
 - *Manual movements of table and headboard. Blade, bladeguide, blade inclination and grinder are controlled by key-board .*
- OPTIONS: free hands cutting device for manual contour in safety*

